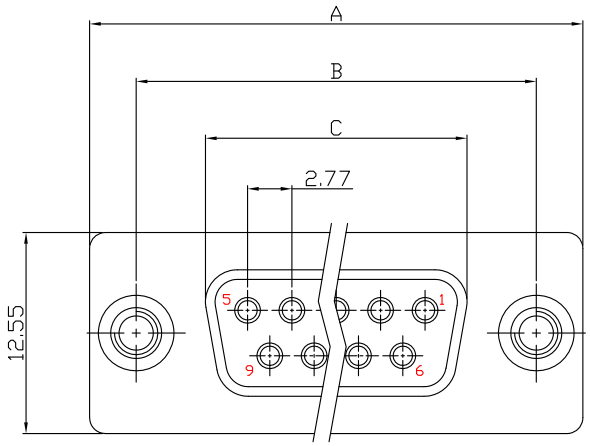

MATERIALS:
1. Housing: PBT (UL 94V-0), Black / White
2. Contacts: Brass
3. Shell: SPCC
4. Back Nut: Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Back Nut: Nickel Plated

SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

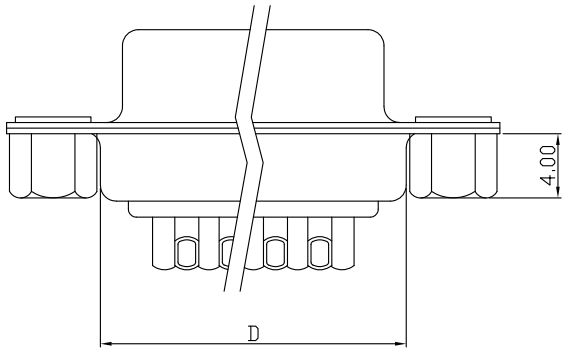

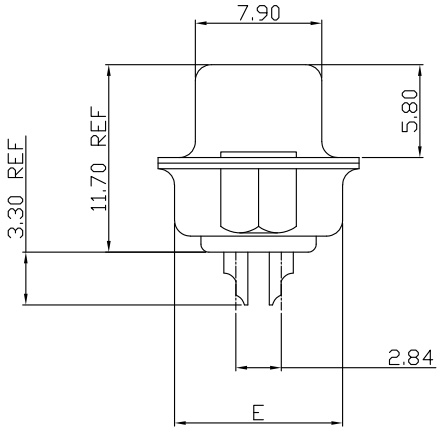

僅供參考

NO. OF POS.	A	B	C	D	E
09F	30.80	24.99	16.33	19.10	10.50
15F	39.20	33.32	24.75	27.60	10.60
25F	53.04	47.04	38.38	41.10	10.60
37F	69.40	63.50	54.80	57.44	10.70

KIN TA PRECISION CO., LTD.
金 泰 精 密 有 限 公 司

TITLE /品名：D-Sub 180度 二排 母座 Solder Type (鐵殼兩側鉚銅柱)(鉚下方銅柱H=4.0)

PART NO /料號：D82110-xxF-Rxxxx

APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位	
Kin	Chenrong	Chenrong	K-0D-050-00	mm	SHEET 1 OF 1

核準發行章

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19

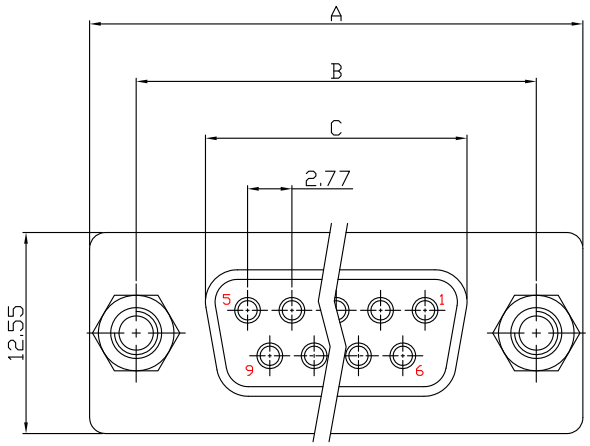

MATERIALS:
1. Housing: PBT (UL 94V-0), Black / White
2. Contacts: Brass
3. Shell: SPCC
4. Screw Nut: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Screw Nut: Nickel Plated

SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

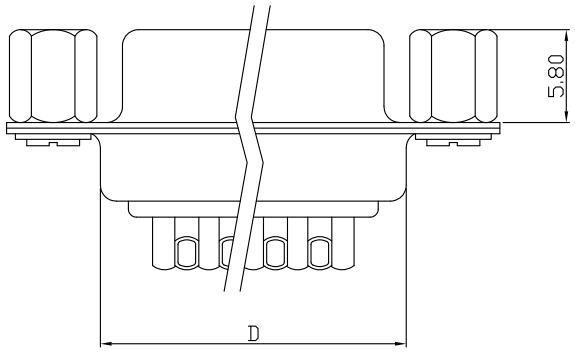

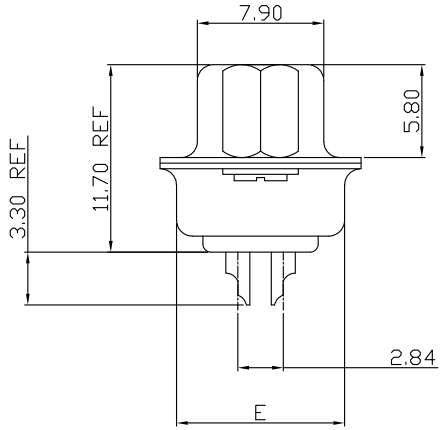

僅供參考

NO. OF POS.	A	B	C	D	E
09F	30.80	24.99	16.33	19.10	10.50
15F	39.20	33.32	24.75	27.60	10.60
25F	53.04	47.04	38.38	41.10	10.60
37F	69.40	63.50	54.80	57.44	10.70

KIN TA PRECISION CO., LTD.
金 泰 精 密 有 限 公 司

TITLE /品名：D-Sub 180度 二排 母座 Solder Type (鐵殼兩側鉚銅柱)(鉚上方銅柱H=5.8)

PART NO /料號：D82330-xxF-Rxxxx

APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位	
Kin	Chenrong	Chenrong	K-0D-051-00	mm	SHEET 1 OF 1

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19

核準發行章