


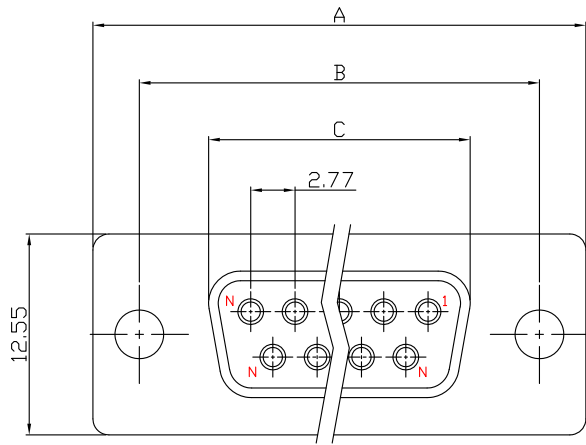

MATERIALS:



1. Housing: PBT (UL 94V-0), Black / White
2. Contacts: Brass
3. Shell: SPCC

FINISH:

1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

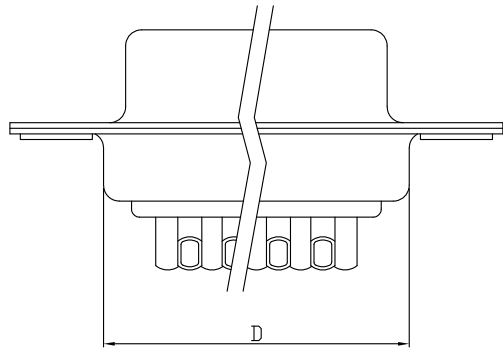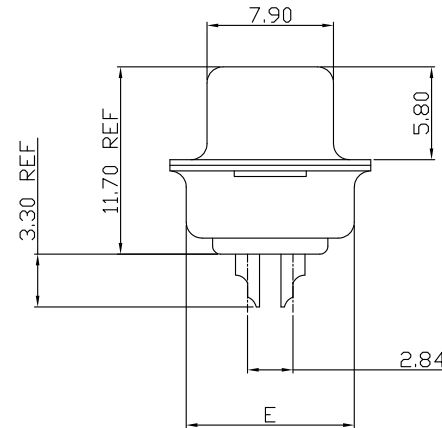

僅供參考

NO. OF POS.	A	B	C	D	E
09F	30.80	24.99	16.33	19.10	10.50
15F	39.20	33.32	24.75	27.60	10.60
25F	53.04	47.04	38.38	41.10	10.60
37F	69.40	63.50	54.80	57.44	10.70

KIN TA PRECISION CO., LTD.
金泰精密有限公司

TITLE / 品名: D-Sub 180度 二排 母座 Solder Type (標規/無銅柱)

核準發行章

PART NO / 料號: D82000-xxF-Rxxxx

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位		
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-0D-041-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	修訂內容	日期
1.0		圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19