

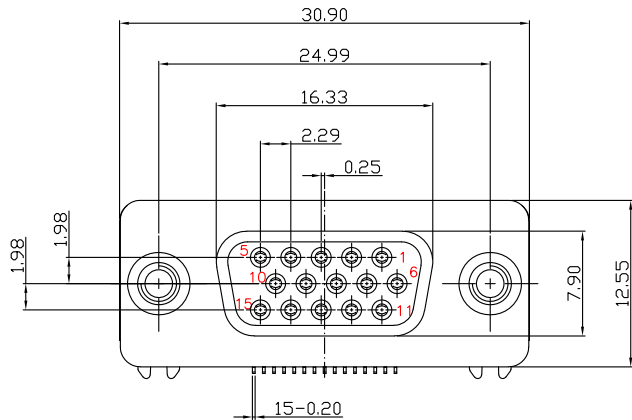
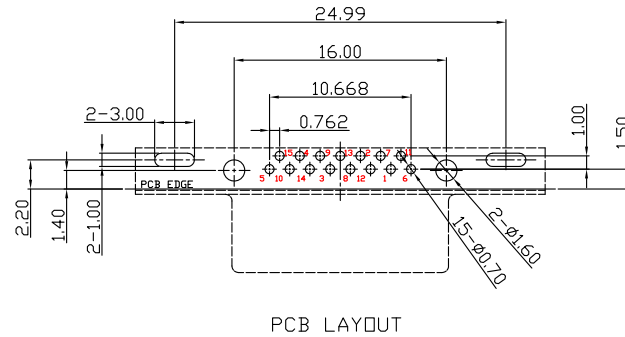
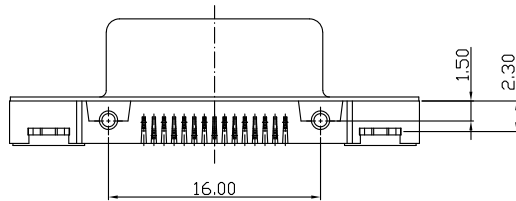



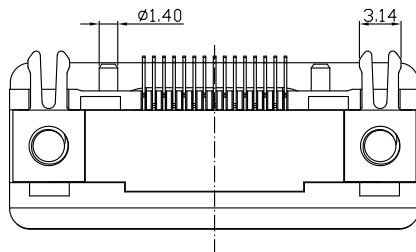


- MATERIALS:
1. Housing: LCP (UL 94V-0), Bkack / Blue
 2. Contacts: Brass
 3. Shell: SPCC
 4. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
 5. Board Lock: Brass
 6. Screw: SPCC
- Or Copper Alloy(Lead $\leq$ 40000PPM)

- FINISH:
1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
 2. Shell: Nickel Plated
 3. Rivet: Nickel Plated
 4. Board Lock: Tin Plated Over Nickel
 5. Screw: Nickel Plated


- SPECIFICATION:
1. Current Rating: 1 Amp
 2. Dielectric Withstanding Voltage: AC 500V For 1 minute
 3. Insulation Resistance: 5000M Ω Min
 4. Contact Resistance: 30m Ω Max.
 5. Operating Temperature: -55°C to +105°C



鉚合型



鉚合鎖螺絲型



僅供參考

NO	DIM A
1	1.95
2	2.50

核準發行章

KIN TA PRECISION CO., LTD.
金泰精密有限公司

TITLE / 品名: VGA 90度 15母 沉板 (板上4.275/板邊距1.6) Dip Type

PART NO / 料號: D50110-15F-15F-RXXXX

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位		
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-SM-019-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	修訂內容	日期
1.0		圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19