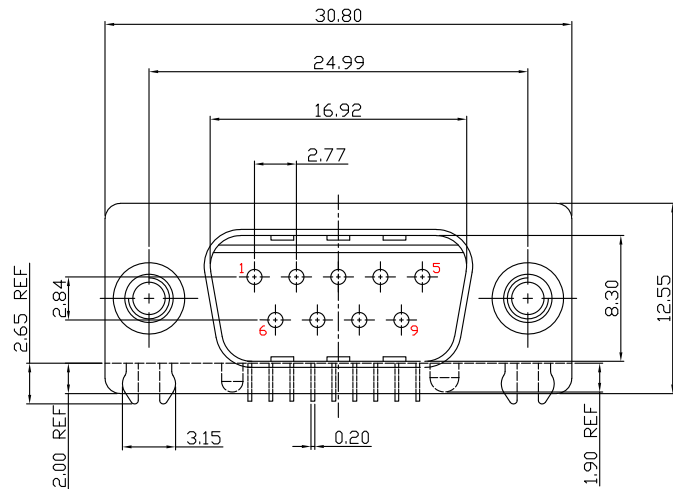


P.C.B. LAYOUT

MATERIALS:



1. Housing: PA9T / PBT (UL 94V-0), Black
 2. Contacts: Brass
 3. Shell: SPCC
 4. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
 5. Board Lock: SPCC
 6. Screw: SPCC
- Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:



1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

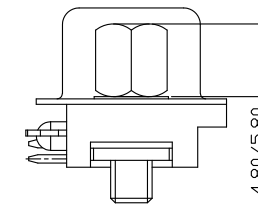

鉚合鎖螺絲型

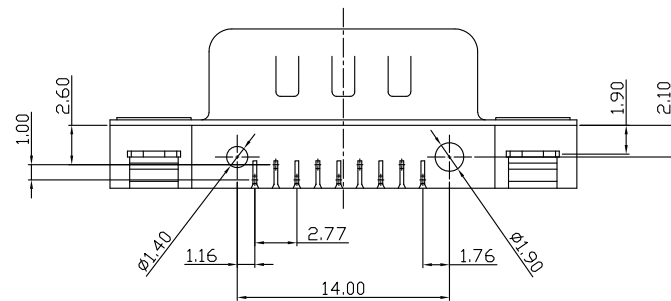

鉚合型

KIN TA PRECISION CO., LTD.
金泰精密有限公司

TITLE / 品名: D-Sub 90度 二排 9公 沉板2.0 板上4.275 板邊距2.6 Dip Type (定位柱間距14.0--1.16 / 1.76)

PART NO / 料號: D40310-09M-Rxxxx

僅供參考

核準發行章

APPROVE / 核准

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO / 圖號

UNIT / 單位

SHEET 1 OF 1

NO. REV / 版本

圖面僅供參考, 實際尺寸以承認圖為主

2025/12/19

修訂內容

日期