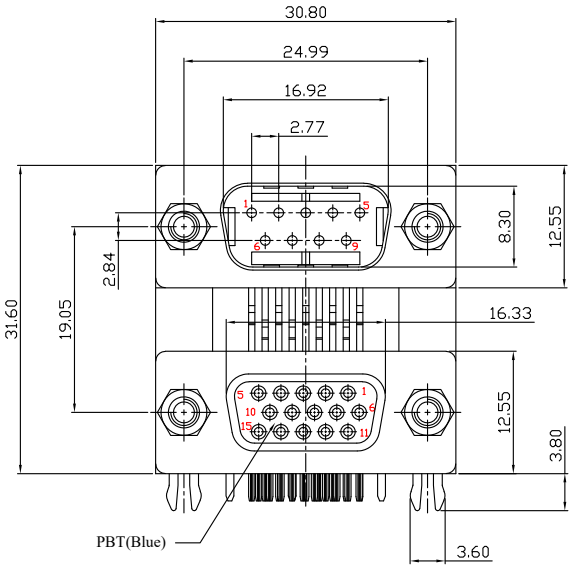

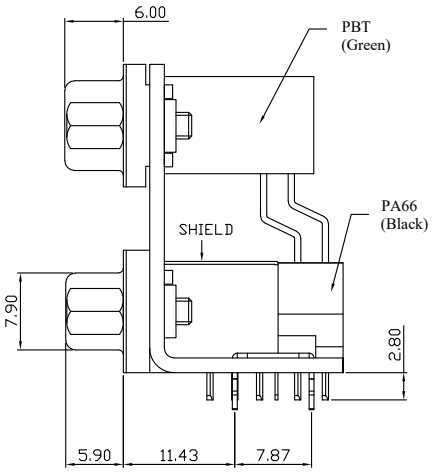

MATERIALS:
1. Housing: PBT (UL 94V-0)
   9M Color: Green
   15F Color: Blue
2. Connecting Seat: PA66 (UL 94V-0) Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead≦40000PPM)
6. Board Lock: SPCC
7. L Bracket: SPCC
8. Shield: SUS
9. Screw: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. 9M Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
   15F Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. L Bracket: Nickel Plated
6. Shield: Nickel Plated
7. Screw: Nickel Plated

SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V For 1 minute
3. Insulation Resistance: 5000MΩ Min
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to +105°C

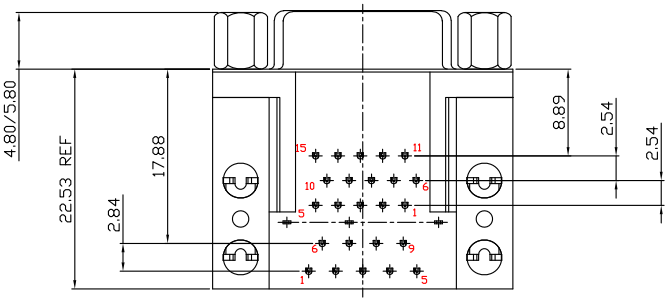

鉚合鎖螺絲型

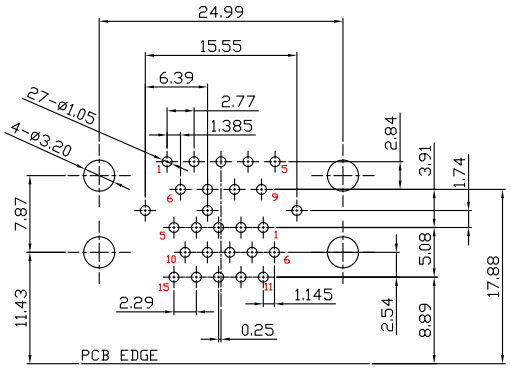

P.C.B. LAYOUT



鉚合型



僅供參考

KIN TA PRECISION CO., LTD. 金泰精密有限公司				TITLE /品名：D-Sub 90度 疊層 9公+VGA-15母(8.89/屏蔽殼/接遞P) Dip Type (層距19.05/後排板邊距17.88)				核準發行章
				PART NO /料號：DB5222-1M1F-Rxxxx				
APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位				
Xin	Chenrong	Chenrong	A-2D-004-00	mm	SHEET 1 OF 1			
						NO.	REV /版本	修訂內容	日期
							1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19