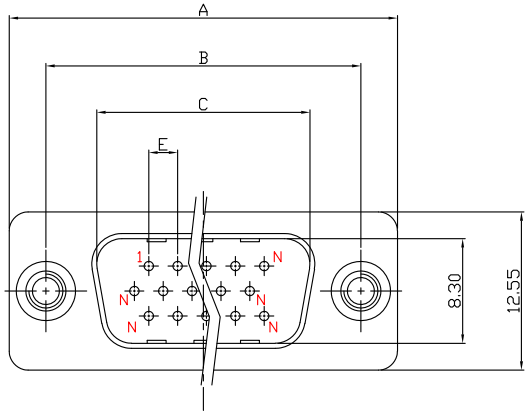

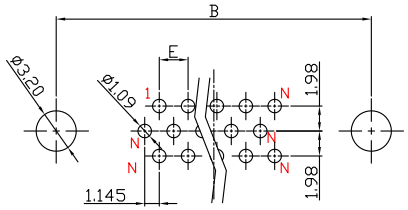

P.C.B. LAYOUT

MATERIALS:
1. Housing: PBT (UL94 V-0), Black
2. Contacts: Brass
3. Shell: SPCC
4. Nut: Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Nut: Nickel Plated

SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

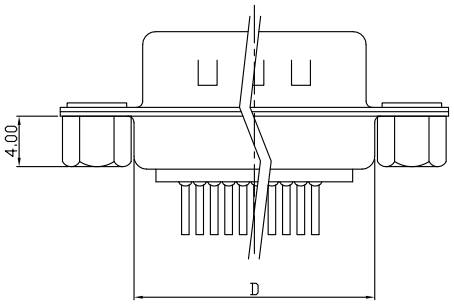



僅供參考

NO. OF POS.	A	B	C	D	E	F
15	30.80	24.99	16.92	19.10	2.29	10.50
26	39.20	33.32	25.25	27.60	2.29	10.70
44	53.10	47.04	38.96	41.10	2.29	10.70
62	69.40	63.50	55.50	57.45	2.41	10.70

KIN TA PRECISION CO., LTD.
金 泰 精 密 有 限 公 司

TITLE /品名：D-Sub 180度 三排 公座 Dip Type (鐵殼兩側鉚銅柱)

PART NO /料號：D91110-xxM-Rxxxx

核準發行章

APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位	
Xin	Chenrong	Chenrong	K-0D-047-00	mm	SHEET 1 OF 1

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19

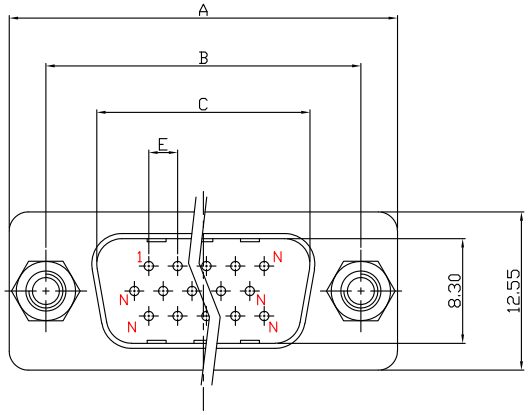

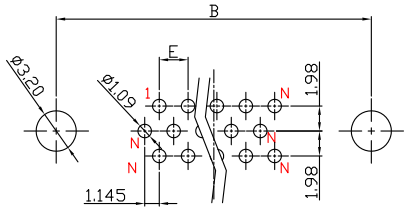

P.C.B. LAYOUT

MATERIALS:
1. Housing: PBT (UL94 V-0), Black
2. Contacts: Brass
3. Shell: SPCC
4. Nut: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Nut: Nickel Plated

SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

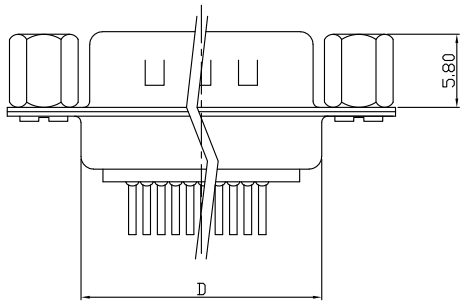



僅供參考

NO. OF POS.	A	B	C	D	E	F
15	30.80	24.99	16.92	19.10	2.29	10.50
26	39.20	33.32	25.25	27.60	2.29	10.70
44	53.10	47.04	38.96	41.10	2.29	10.70
62	69.40	63.50	55.50	57.45	2.41	10.70

KIN TA PRECISION CO., LTD.
金 泰 精 密 有 限 公 司

TITLE /品名：D-Sub 180度 三排 公座 Dip Type (鐵殼兩側鉚銅柱)

PART NO /料號：D91330-xxM-Rxxxx

核準發行章

APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位	
Kin	Chenrong	Chenrong	K-0D-055-00	mm	SHEET 1 OF 1

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19