
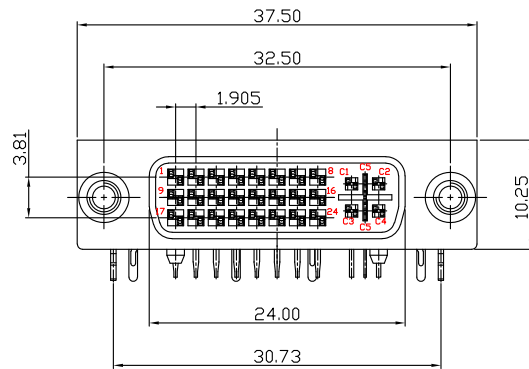


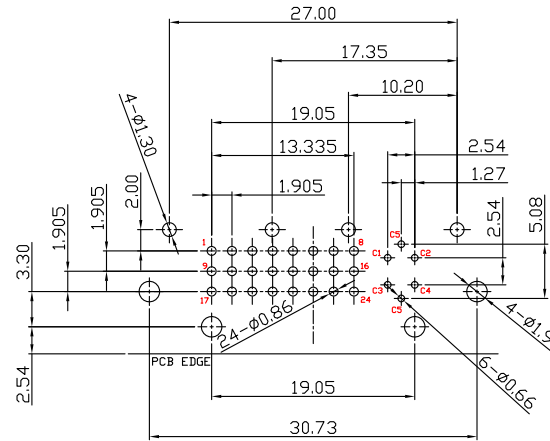

RECOMMENDED PCB LAYOUT

MATERIALS:

1. Housing: PBT / PA66 (UL 94V-0), White / Black
2. Cover: PA66 (UL 94V-0), White / Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
6. Board Lock: SPCC
7. Shield: SPCC
8. Screw: SPCC




Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Shield: Nickel Plated
6. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
3. Insulation Resistance: 1000M Ω Min. at DC 500V For 60S
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -20°C to 85°C

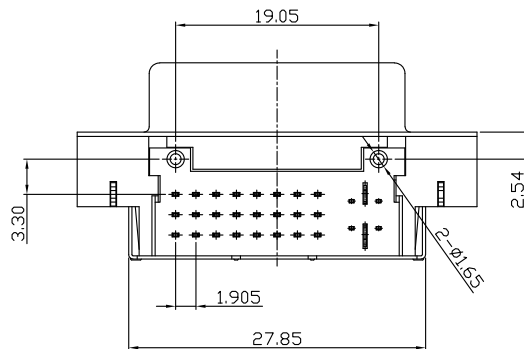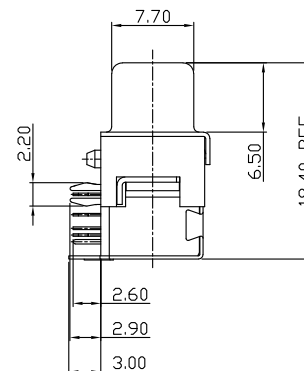

鉗合型



鉗合鎖螺絲型



僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: DVI 90度 母座 (板邊距2.54+3.3) 有柱 加屏蔽殼(接遞P) DIP Type



PART NO / 料號: D72310-29F-Rxxxx

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	A-0V-027-00

UNIT / 單位	SHEET 1 OF 1
mm	

NO.	REV / 版本	修訂內容	日期
	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19

核准發行章

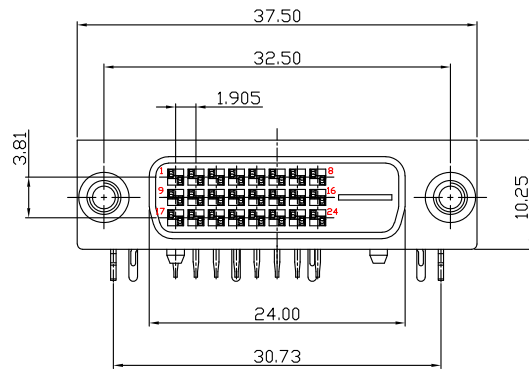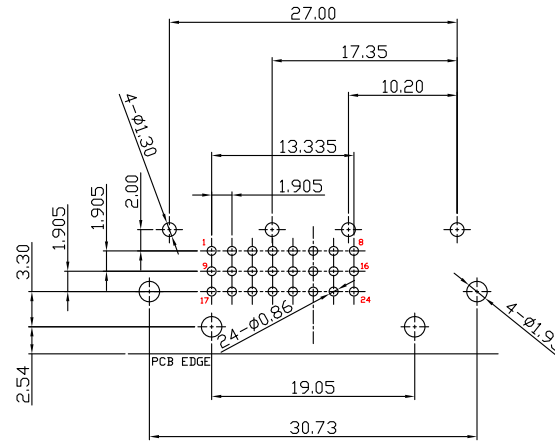

RECOMMENDED PCB LAYOUT

MATERIALS:




1. Housing: PBT / PA66 (UL 94V-0), White / Black
 2. Cover: PA66 (UL 94V-0), White / Black
 3. Contacts: Brass
 4. Shell: SPCC
 5. Rivet: Copper Alloy (Lead ≤ 40000 PPM)
 6. Board Lock: SPCC
 7. Shield: SPCC
 8. Screw: SPCC
- Or Copper Alloy (Lead ≤ 40000 PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Shield: Nickel Plated
6. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
3. Insulation Resistance: 1000M Ω Min. at DC 500V For 60S
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -20°C to 85°C

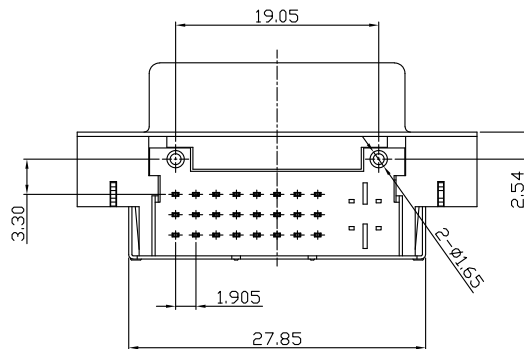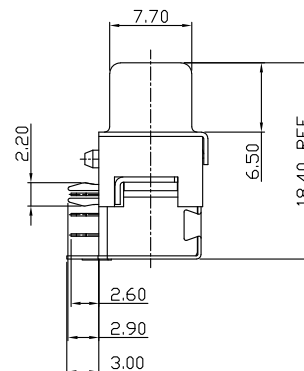

鉗合型



鉗合鎖螺絲型



僅供參考

KIN TA PRECISION CO., LTD.
金泰精密有限公司

TITLE / 品名: DVI 90度 母座 (板邊距2.54+3.3) 有柱 加屏蔽殼(接遞P) DIP Type

核準發行章

PART NO / 料號: D72310-24F-Rxxxx

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
Kin	Chenrong	Chenrong	A-0V-027-00

UNIT / 單位	SHEET 1 OF 1
mm	

NO.	REV / 版本	修訂內容	日期
	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19