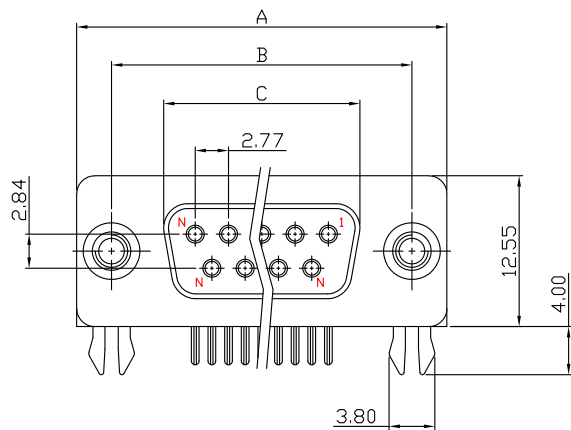


P.C.B. LAYOUT

MATERIALS:



1. Housing: PBT (UL 94V-0), Black
 2. Contacts: Brass
 3. Shell: SPCC
 4. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
 5. Board Lock: SPCC
 6. Screw: SPCC
- Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55 $^{\circ}$ C to 105 $^{\circ}$ C

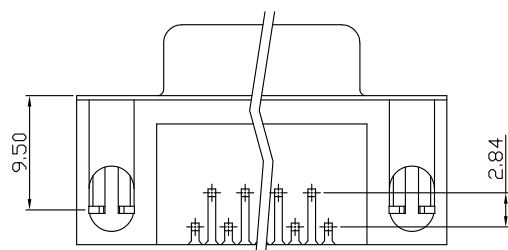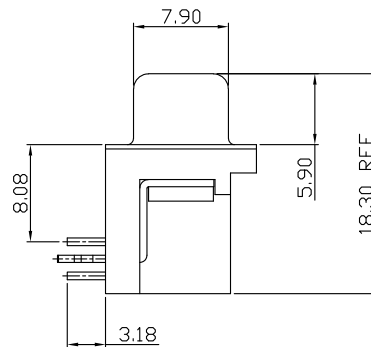

鉗合型



鉗合鎖螺絲型



NO. OF POS.	A	B	C
09Pin	30.80	24.99	16.33
15Pin	39.20	33.32	24.66
25Pin	53.04	47.04	38.38
37Pin	69.40	63.50	54.80

僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: D-Sub 90度 二排 母座 (板邊距8.08) Dip Type

PART NO / 料號: D1110-xxF-Rxxxx

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	⊕	△
Kin	Chenrong	Chenrong	K-0D-003-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	修訂內容	日期
△			
△			
△			
	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19

核准發行章