


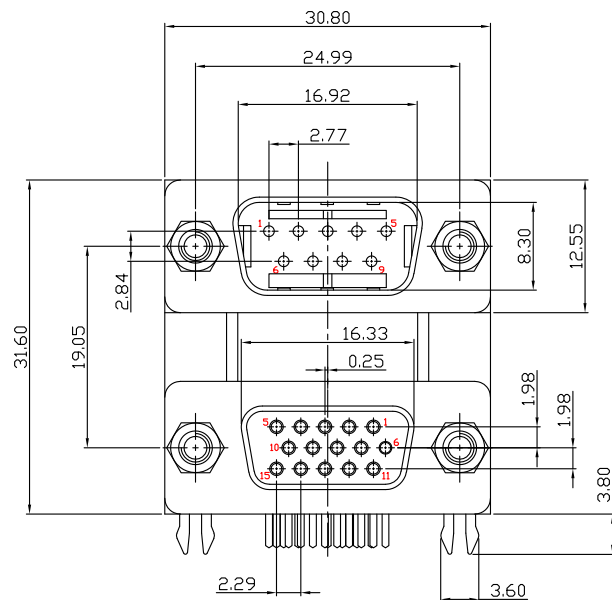
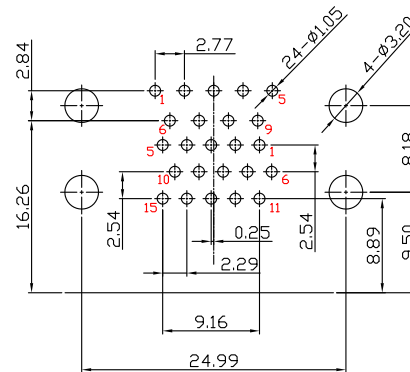



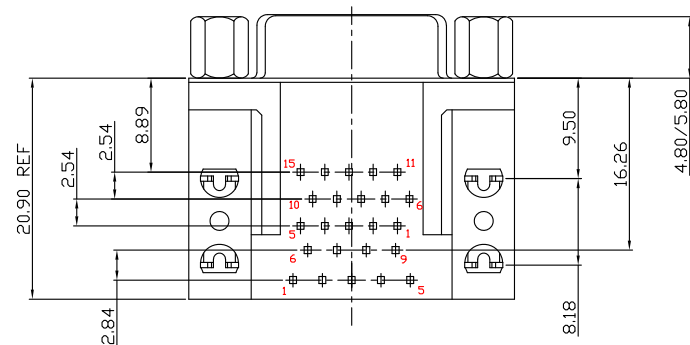

PCB LAYOUT

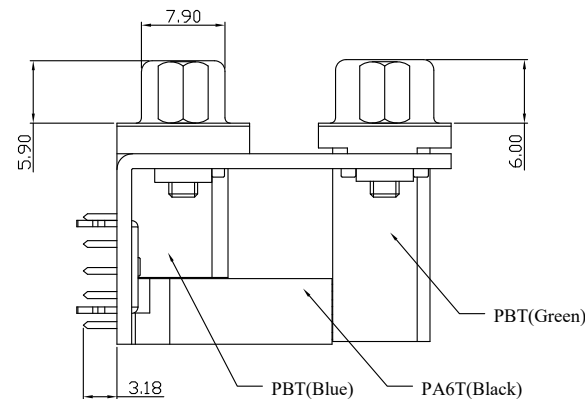

鉚合鎖螺絲型

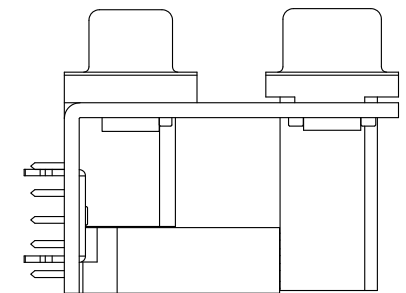

鉚合型

MATERIALS:

- Housing: PBT (UL 94V-0)
9M Color: Green
15F Color: Blue
- Connecting Seat: PA6T (UL 94V-0), Black
- Contacts: Brass
- Shell: SPCC
- Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
- Board Lock: SPCC
- L Bracket: SPCC
- Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:

- 9M Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- 15F Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- Shell: Nickel Plated
- Rivet: Nickel Plated
- Board Lock: Tin Plated
- L Bracket: Nickel Plated
- Screw: Nickel Plated

SPECIFICATION:

- Current Rating: 2 Amp
- Dielectric Withstanding Voltage: AC 500V For 1 minute
- Insulation Resistance: 5000M Ω Min
- Contact Resistance: 30m Ω Max.
- Operating Temperature: -55°C to +105°C

僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: D-Sub 90度 疊層 9公+VGA-15母(8.89) Dip Type (層距19.05/後排板邊距16.26)

PART NO / 料號: DB1122-1M1F-RXXXX

核準發行章

APPROVE / 核準

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO / 圖號

UNIT / 單位

SHEET 1 OF 1

1.0

NO. REV / 版本

圖面僅供參考, 實際尺寸以承認圖為主

修訂內容

日期

Kin

Chenrong

Chenrong

A-2D-003-00

mm

2025/12/19