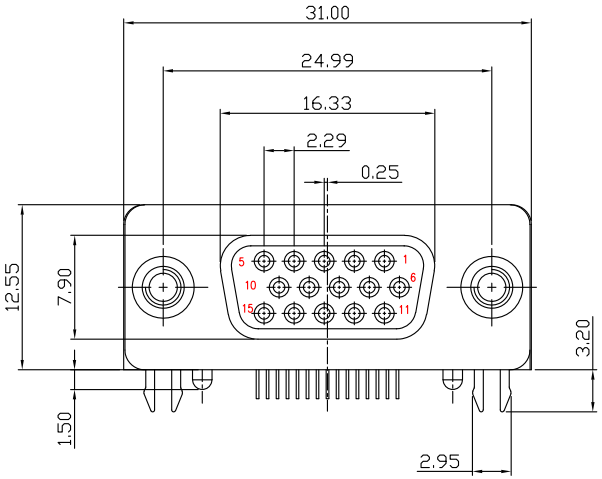

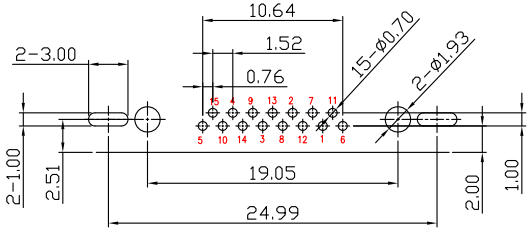

PCB LAYOUT

MATERIALS:
1. Housing: PBT (UL 94V-0), Blue
2. Cover: PA66 (UL 94V-0), Blue
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead≦40000PPM)
6. Board Lock: SPCC
7. Screw: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:
1. Current Rating: 1 Amp
2. Dielectric Withstanding Voltage: AC 500V For 1 minute
3. Insulation Resistance: 5000MΩ Min
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to +105°C

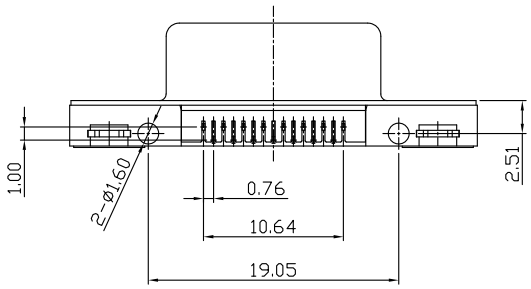

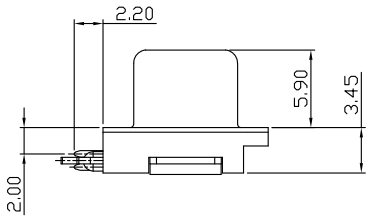

鉚合型



鉚合鎖螺絲型



僅供參考

KIN TA PRECISION CO., LTD. 金泰精密有限公司				TITLE /品名：VGA 90度 15母 (板邊距2.0) Dip Type (排距1.0/前8P+後7P)		核準發行章
				PART NO /料號：D2410-15F-Rxxxx		
APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位	SHEET 1 OF 1	
Xin	Chenrong	Chenrong	A-0D-006-00	mm		

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19