

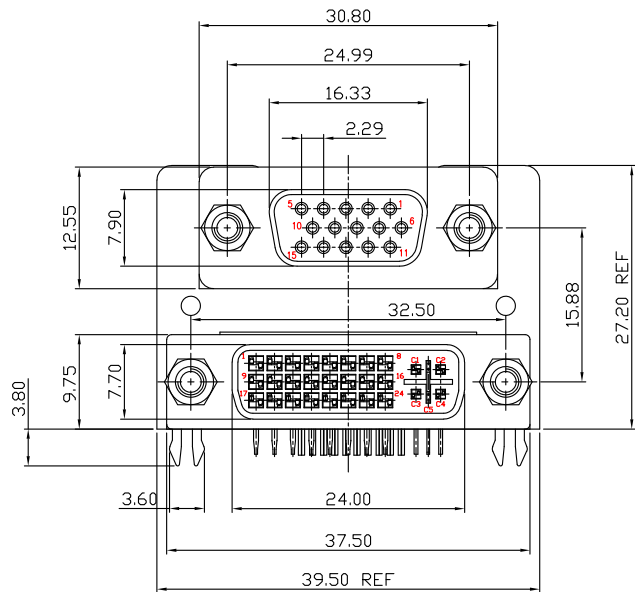


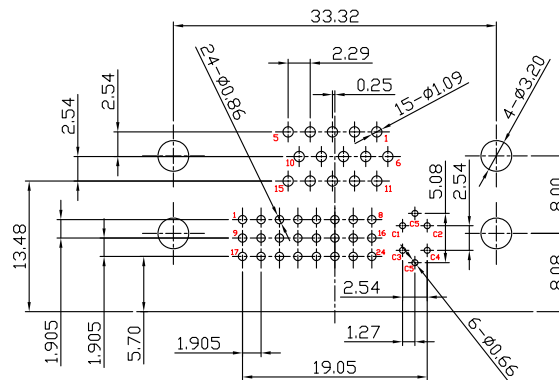

PCB LAYOUT



MATERIALS:

- 15F Housing: PBT (UL 94V-0), Blue / Black
- DVI Housing: PA66 (UL 94V-0), Natural White
- Contacts: Brass
- Shell: SPCC
- Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
- Board Lock: SPCC
- L Bracket: SPCC
- Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:



- 15F Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- DVI Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- Shell: Nickel Plated
- Rivet: Nickel Plated
- Board Lock: Tin Plated
- L Bracket: Nickel Plated
- Screw: Nickel Plated

(VGA 15F)SPECIFICATION:


- Current Rating: 2 Amp
- Dielectric Withstanding Voltage: AC 500V For 1 minute
- Insulation Resistance: 5000M Ω Min
- Contact Resistance: 30m Ω Max.
- Operating Temperature: -55°C to +105°C

(DVI)SPECIFICATION:

- Current Rating: 1.5 Amp
- Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
- Insulation Resistance: 1000M Ω Min. at DC 500V For 60S
- Contact Resistance: 30m Ω Max.
- Operating Temperature: -20°C to 85°C

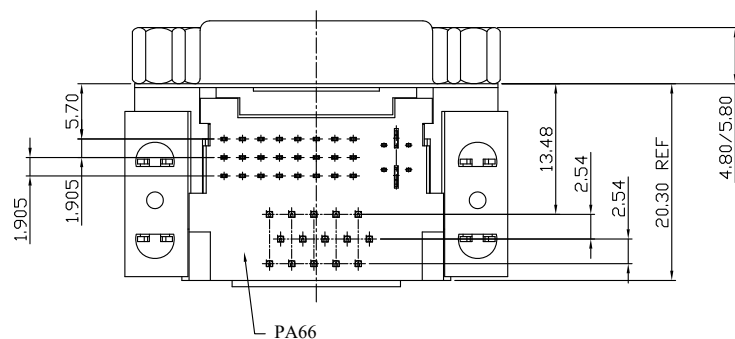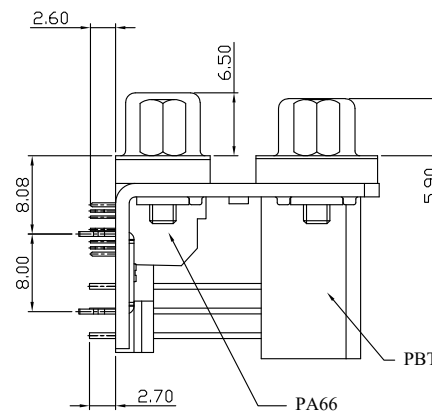

鉚合鎖螺絲型



鉚合型

僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: VGA-15母座+DVI(母座) 90度 疊層 Dip Type (層距15.88)



PART NO / 料號: DE1122-1F2F-Rxxxx

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-DV-001-00




UNIT / 單位	SHEET 1 OF 1
mm	

NO.	REV / 版本	修訂內容	日期
1.0		圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19


核准發行章

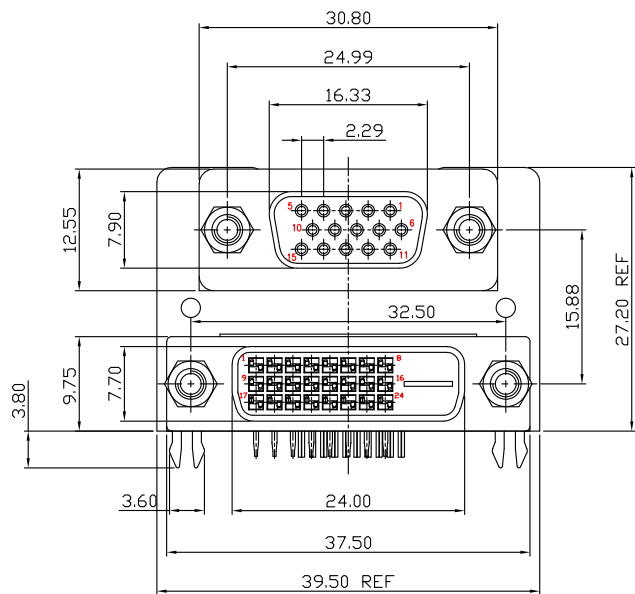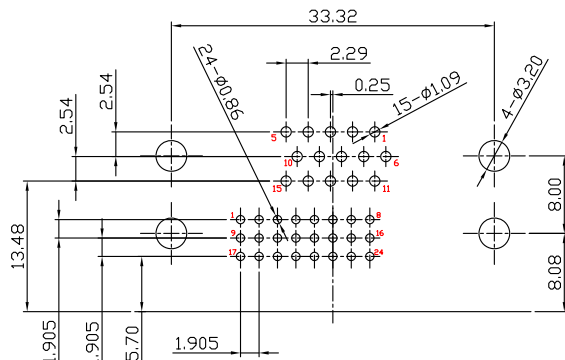

PCB LAYOUT

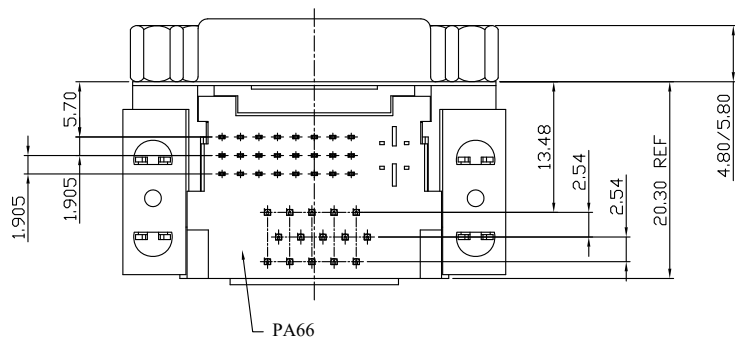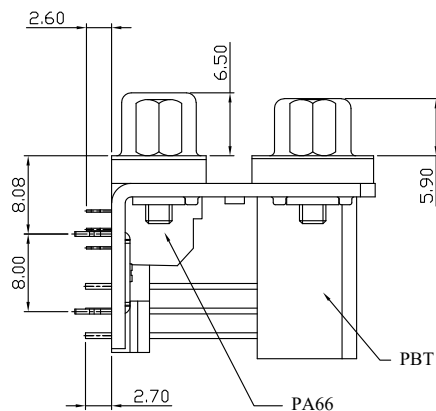

鉚合鎖螺絲型



鉚合型

僅供參考

MATERIALS:

- 15F Housing: PBT (UL 94V-0), Blue / Black
- DVI Housing: PA66 (UL 94V-0), Natural White
- Contacts: Brass
- Shell: SPCC
- Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
- Board Lock: SPCC
- L Bracket: SPCC
- Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:

- 15F Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- DVI Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- Shell: Nickel Plated
- Rivet: Nickel Plated
- Board Lock: Tin Plated
- L Bracket: Nickel Plated
- Screw: Nickel Plated

(VGA 15F)SPECIFICATION:

- Current Rating: 2 Amp
- Dielectric Withstanding Voltage: AC 500V For 1 minute
- Insulation Resistance: 5000M Ω Min
- Contact Resistance: 30m Ω Max.
- Operating Temperature: -55°C to +105°C

(DVI)SPECIFICATION:

- Current Rating: 1.5 Amp
- Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
- Insulation Resistance: 1000M Ω Min. at DC 500V For 60S
- Contact Resistance: 30m Ω Max.
- Operating Temperature: -20°C to 85°C

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: VGA-15母座+DVI(母座) 90度 疊層 Dip Type (層距15.88)

PART NO / 料號: DE1122-1F1F-Rxxxx

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-DV-001-00

UNIT / 單位	
mm	

SHEET 1 OF 1

NO.	REV / 版本	修訂內容	日期
	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19

核准發行章