


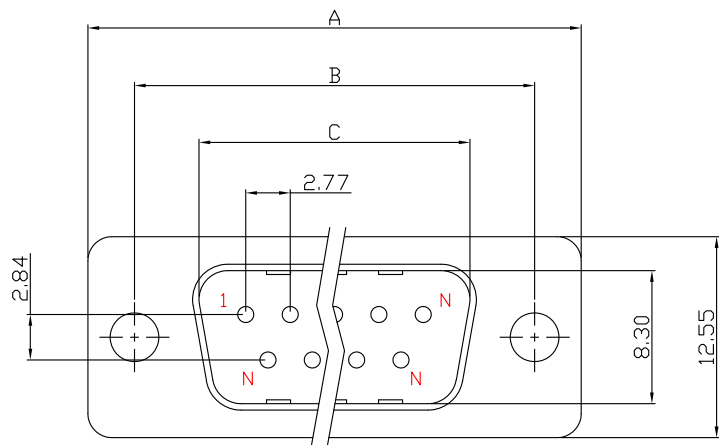

MATERIALS:



1. Housing: PBT (UL 94V-0), Black / White
2. Contacts: Brass
3. Shell: SPCC

FINISH:

1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

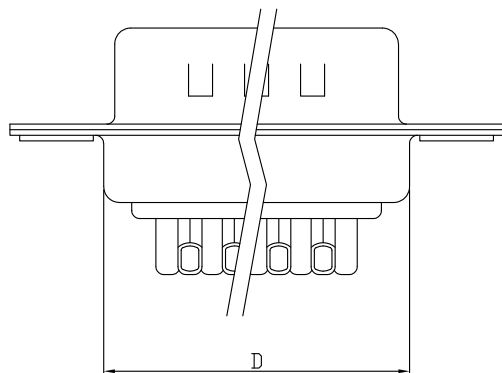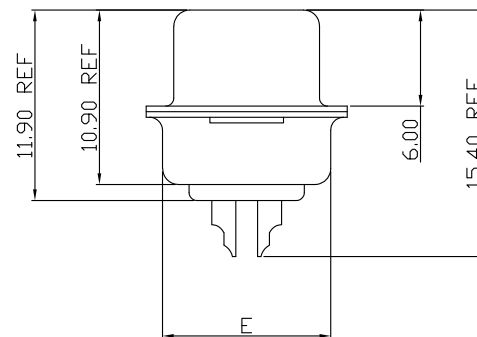

僅供參考

NO. OF POS.	A	B	C	D	E
09	30.80	24.99	16.92	19.10	10.50
15	39.20	33.32	25.25	27.60	10.60
25	53.04	47.04	38.96	41.10	10.60
37	69.40	63.50	55.42	57.44	10.70

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: D-Sub 180度 二排 公座 Solder Type (標規/無銅柱)

PART NO / 料號: D82000-xxM-Rxxxx

核準發行章

APPROVE / 核準

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO / 圖號

UNIT / 單位

SHEET 1 OF 1

NO. REV / 版本

修訂內容

日期

2025/12/19

核準發行章