

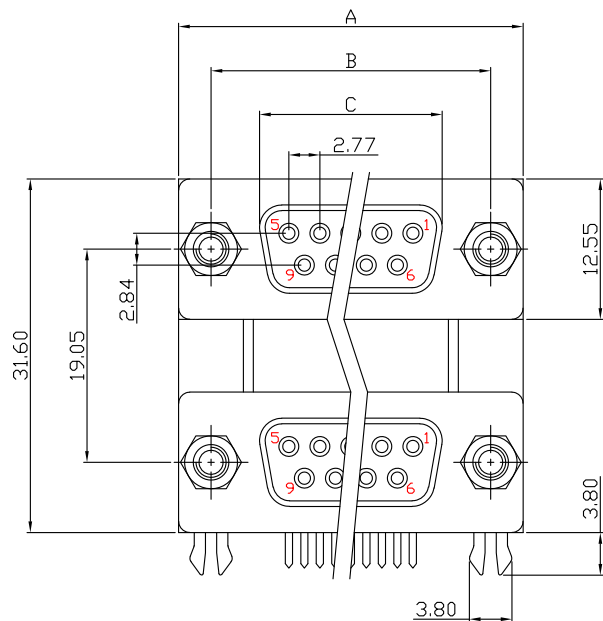
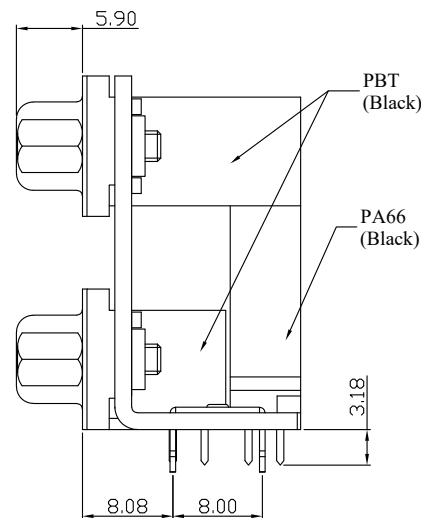

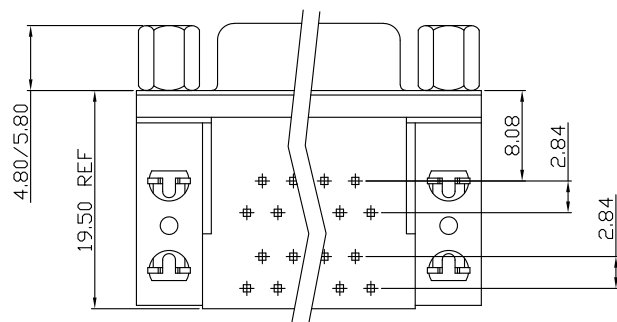


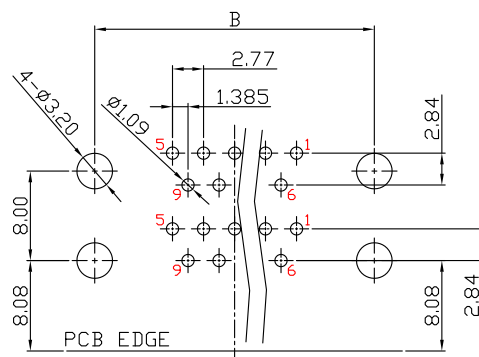

- MATERIALS:**
- Housing: PBT (UL 94V-0), Black
 - Connecting Seat: PA66 (UL 94V-0), Black
 - Contacts: Brass
 - Shell: SPCC
 - Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
 - Board Lock: SPCC
 - L Bracket: SPCC
 - Screw: SPCC
- Or Copper Alloy(Lead $\leq$ 40000PPM)
- FINISH:**
- Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
 - Shell: Nickel Plated
 - Rivet: Nickel Plated
 - Board Lock: Tin Plated
 - L Bracket: Nickel Plated
 - Screw: Nickel Plated
- SPECIFICATION:**
- Current Rating: 2 Amp
 - Dielectric Withstanding Voltage: AC 500V For 1 minute
 - Insulation Resistance: 5000M Ω Min
 - Contact Resistance: 30m Ω Max.
 - Operating Temperature: -55°C to +105°C

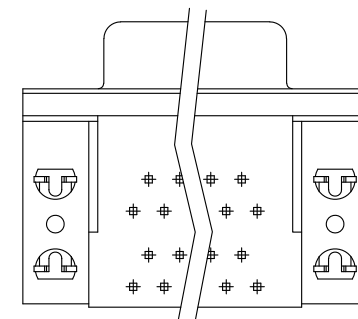

鉚合型

僅供參考

NO. OF POS.	A	B	C
09	30.80	24.99	16.33
15	39.20	33.32	24.66
25	53.04	47.04	38.38
37	69.40	63.50	54.80

鉚合鎖螺絲型

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: D-Sub 90度 疊層 二排 母座+母座 Dip Type (層距19.05)

PART NO / 料號: DA1122-xFxF-Rxxxx

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	⊕	▽
Kin	Chenrong	Chenrong	K-2D-013-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	修訂內容	日期
1.0		圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19

核準發行章