
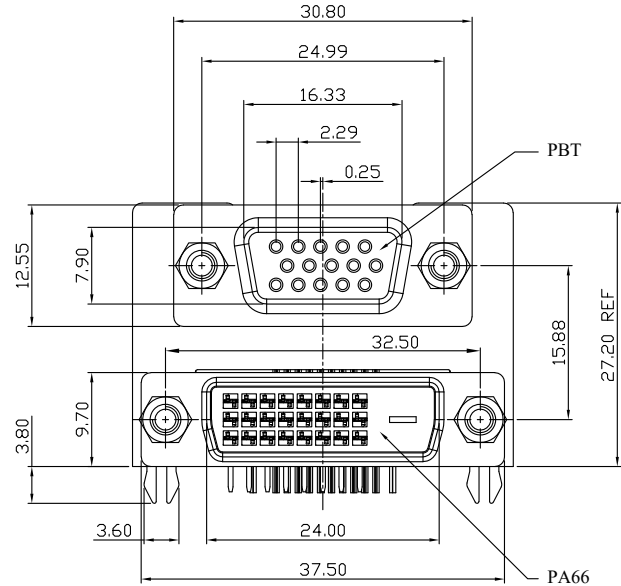


8 7 6 5 4 3 2 1


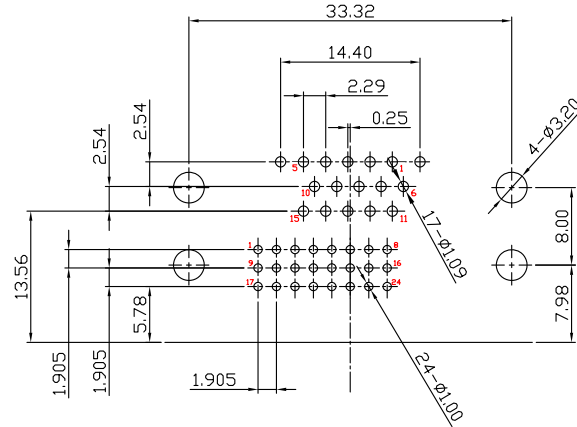


PCB LAYOUT


- MATERIALS:**
- 15F Housing: PBT (UL 94V-0), Black / Blue
DVI Housing: PA66 (UL 94V-0), Ivory
 - Cover: PA66 (UL 94V-0), Ivory
 - Contacts: Brass
 - Shell: SPCC
 - Board Lock: SPCC
 - L Bracket: SPCC
 - Screw: SPCC
Or Copper Alloy(Lead ≤ 40000PPM)
 - Shield: SPCC
- FINISH:**
- 15F Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
 - DVI Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
 - Shell: Nickel Plated
 - Board Lock: Tin Plated
 - L Bracket: Nickel Plated
 - Screw: Nickel Plated
 - Shield: Nickel Plated

- (VGA 15F)SPECIFICATION:**
- Current Rating: 2 Amp
 - Dielectric Withstanding Voltage: AC 500V For 1 minute
 - Insulation Resistance: 5000MΩ Min
 - Contact Resistance: 30mΩ Max.
 - Operating Temperature: -55°C to +105°C

- (DVI)SPECIFICATION:**
- Current Rating: 1.5 Amp
 - Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
 - Insulation Resistance: 1000MΩ Min. at DC 500V For 60S
 - Contact Resistance: 30mΩ Max.
 - Operating Temperature: -20°C to 85°C

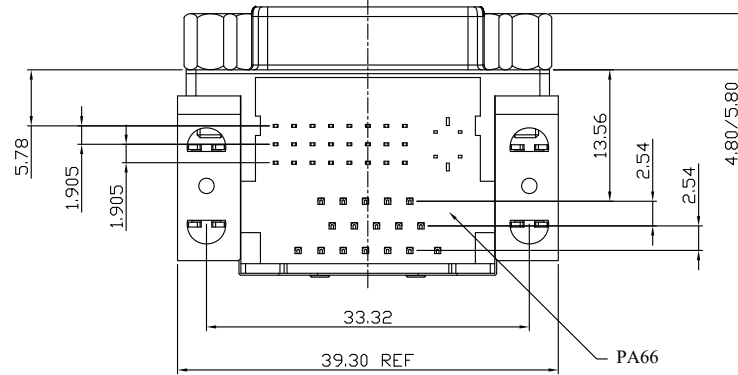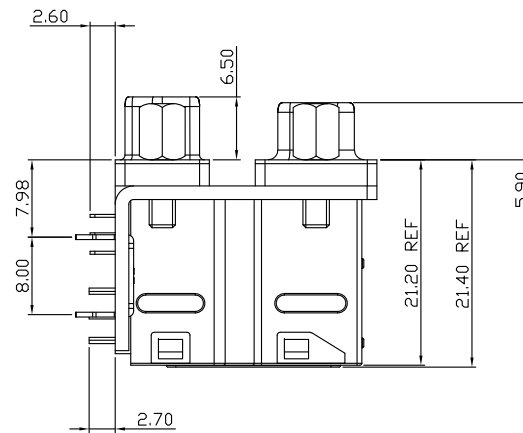

直鎖螺絲型



僅供參考

KIN TA PRECISION CO., LTD.
金泰精密有限公司

TITLE / 品名: VGA-15母座+DVI(母座) 90度 疊層 Dip Type 加屏蔽殼/接遞P (層距15.88)

核準發行章

APPROVE / 核準
Kin

CHECKED / 審查
Chenrong

DRAWING / 繪圖
Chenrong

DRAWING NO / 圖號
K-DV-002-00

PART NO / 料號: DE3222-1F1F-Rxxxx

UNIT / 單位
mm

SHEET 1 OF 1

NO.	REV / 版本	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19
		修訂內容		日期

8 7 6 5 4 3 2 1