

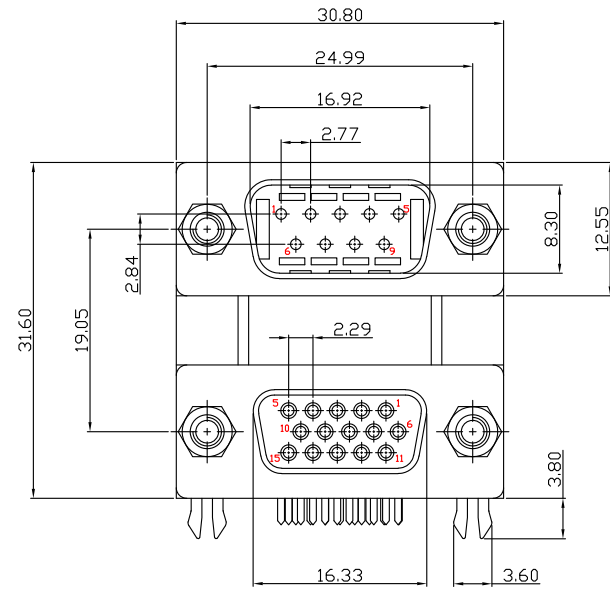
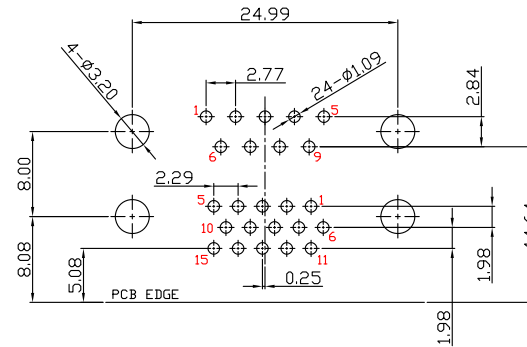




P.C.B. LAYOUT

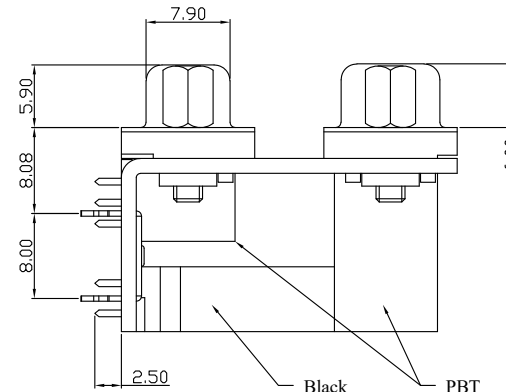

鉚合鎖螺絲型

MATERIALS:

1. Housing: PBT (UL 94V-0),
9M Color: Green
15F Color: Blue
2. Connecting Seat: PBT (UL 94V-0), Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
6. Board Lock: Brass
7. L Bracket: SPCC
8. Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)


FINISH:

1. 9M Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- 15F Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All

2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. L Bracket: Nickel Plated
6. Screw: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V For 1 minute
3. Insulation Resistance: 5000M Ω Min
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to +105°C

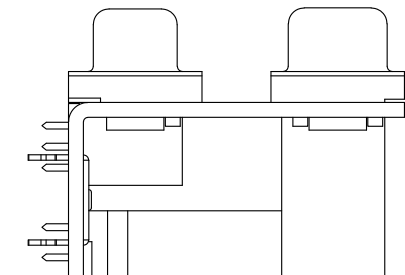

鉚合型

僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: D-Sub 90度 疊層 9P公+VGA-15母(5.08) Dip Type (層距19.05)

PART NO / 料號: DB2122-1M1F-Rxxxx

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-2D-005-00

UNIT / 單位	SHEET 1 OF 1
mm	

NO.	REV / 版本	修訂內容	日期
	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19

核准發行章