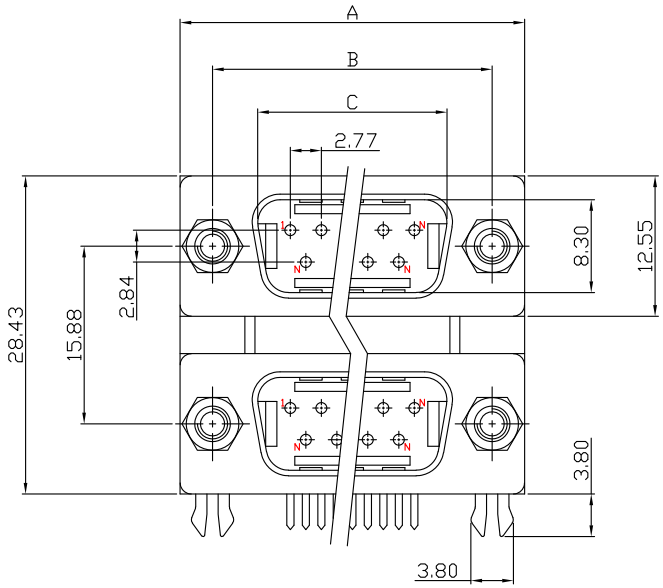

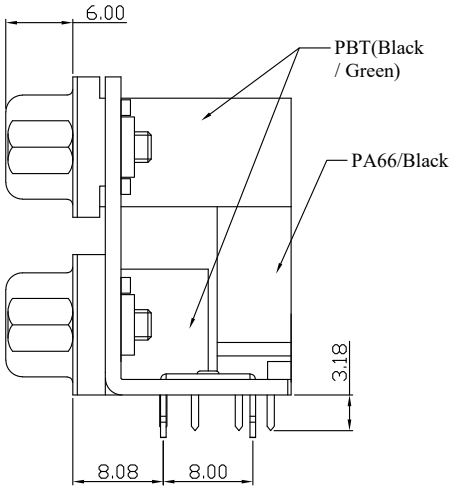

MATERIALS:
1. Housing: PBT (UL 94V-0), Black / Green
2. Connecting Seat: PA66 (UL 94V-0), Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead≦40000PPM)
6. Board Lock: Brass
7. L Bracket: SPCC
8. Screw: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. L Bracket: Nickel Plated
6. Screw: Nickel Plated

SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V For 1 minute
3. Insulation Resistance: 5000MΩ Min
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to +105°C



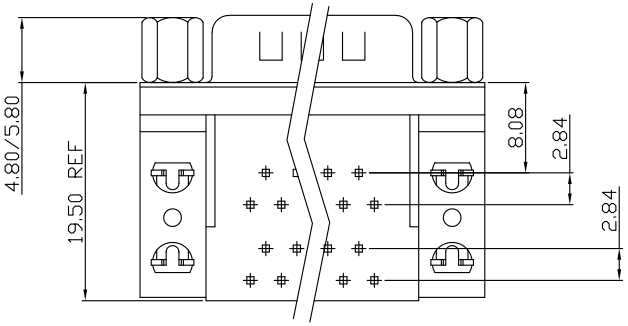

鉚合鎖螺絲型

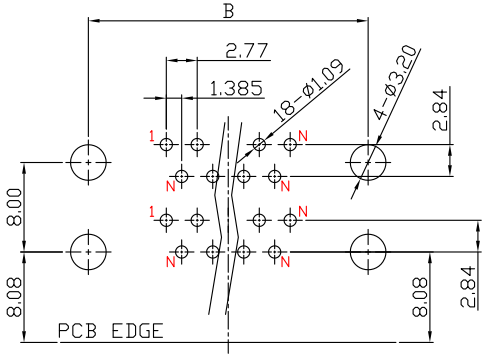

P.C.B. LAYOUT

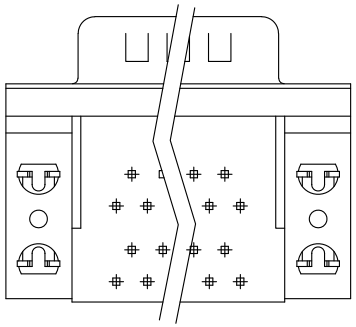

鉚合型

僅供參考

NO. OF POS.	A	B	C
09	30.80	24.99	16.92
15	39.20	33.32	25.25
25	53.04	47.04	38.96
37	69.66	63.50	55.42

KIN TA PRECISION CO., LTD.
金 泰 精 密 有 限 公 司

TITLE /品名：D-Sub 90度 疊層 二排 公座+公座 Dip Type (層距15.88)

PART NO /料號：DA2122-xMxM-Rxxxx

核準發行章

APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位	SHEET 1 OF 1
Xin	Chenrong	Chenrong	K-2D-025-00	mm	

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19