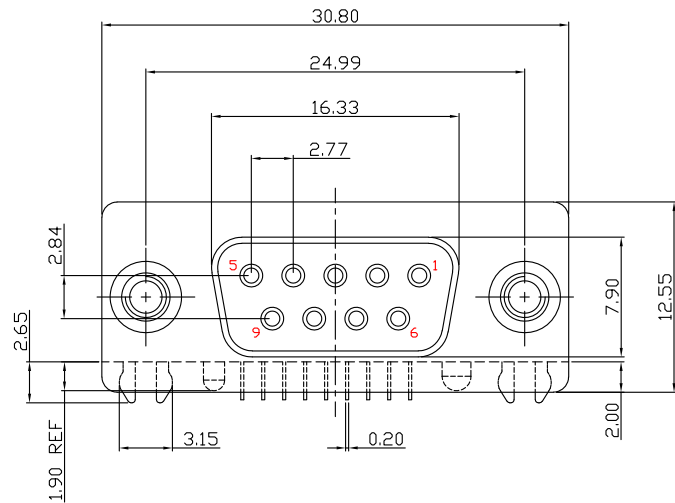


P.C.B. LAYOUT

MATERIALS:



1. Housing: PBT (UL 94V-0), Black
2. Contacts: Brass
3. Shell: SPCC
4. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
5. Board Lock: SPCC
6. Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

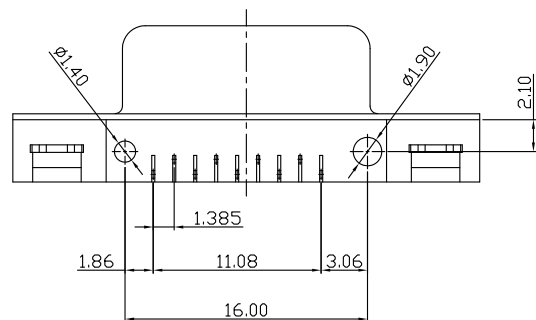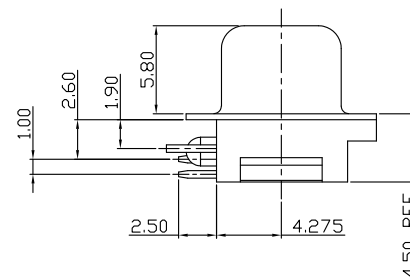

鉗合型

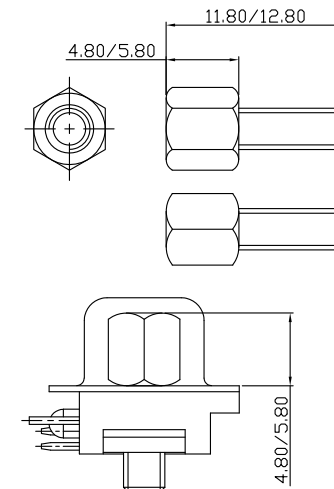

鉗合鎖螺絲型

僅供參考

KIN TA PRECISION CO., LTD.
金泰精密有限公司

TITLE / 品名: D-Sub 90度 二排 9母 沉板2.0 板上4.275 板邊距2.6 Dip Type (定位柱間距16.0--1.86 / 3.06)

核准發行章

PART NO / 料號: D40210-09F-Rxxxx

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
Kin	Chenrong	Chenrong	L-0D-020-00

UNIT / 單位	SHEET 1 OF 1
mm	

NO.	REV / 版本	修訂內容	日期
	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19