
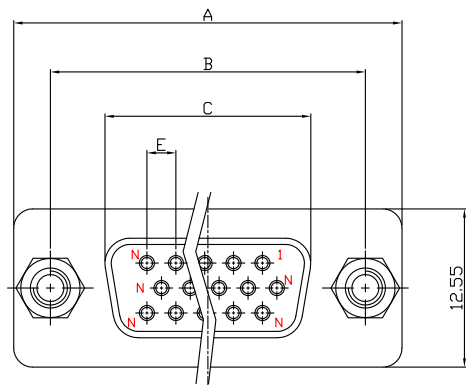
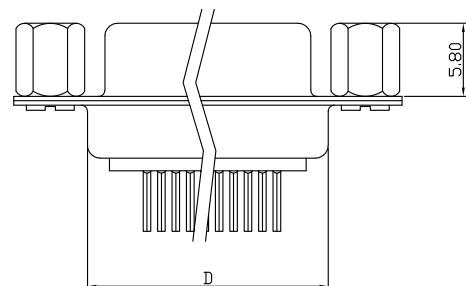


P.C.B. LAYOUT

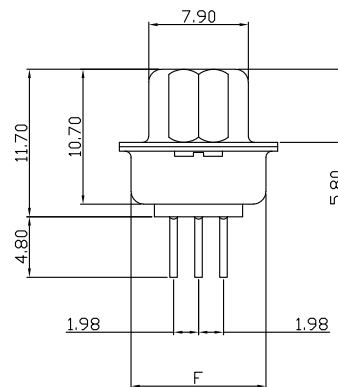

MATERIALS:

1. Housing: PBT (UL94 V-0), Black
 2. Contacts: Brass
 3. Shell: SPCC
 4. Nut: SPCC
- Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:

1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Nut: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

NO. OF POS.	A	B	C	D	E	F
15	30.80	24.99	16.33	19.10	2.29	10.50
26	39.20	33.32	24.80	27.60	2.29	10.70
44	53.10	47.04	38.38	41.10	2.29	10.70
62	69.40	63.50	54.80	57.45	2.41	10.70

僅供參考

KIN TA PRECISION CO., LTD.
金泰精密有限公司

TITLE / 品名: D-Sub 180度 三排 母座 Dip Type (鐵殼兩側鉚銅柱)

核準發行章

PART NO / 料號: D91330-xxF-Rxxxx

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位				NO.	REV / 版本	修訂內容	日期
Kin	Chenrong	Chenrong	K-0D-052-00	mm	SHEET 1 OF 1			1.0		圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19