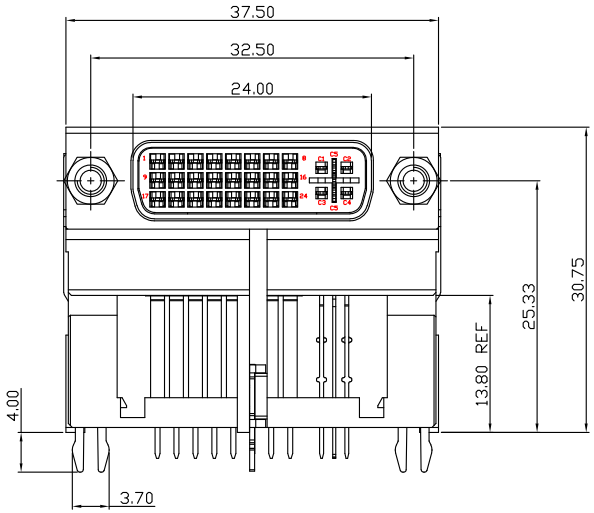

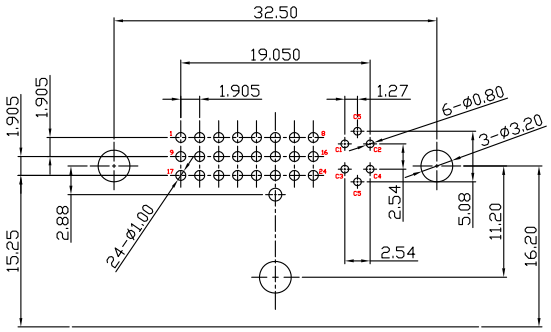

PCB LAYOUT

MATERIALS:
1. Housing: PA66 (UL 94V-0), White / Black
2. Bracket: PA66 (UL 94V-0), Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead≦40000PPM)
6. Board Lock: SPCC
7. Screw: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:
1. Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
3. Insulation Resistance: 1000MΩ Min. at DC 500V For 60S
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -20°C to 85°C

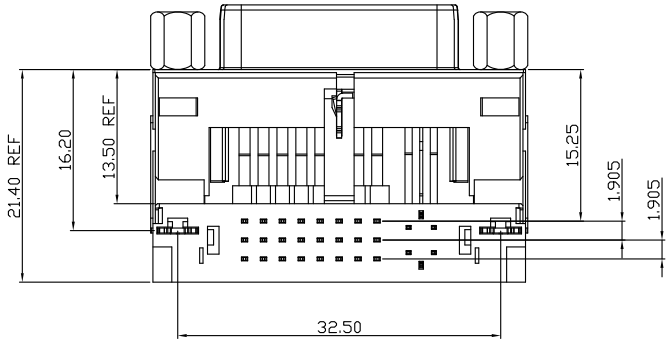

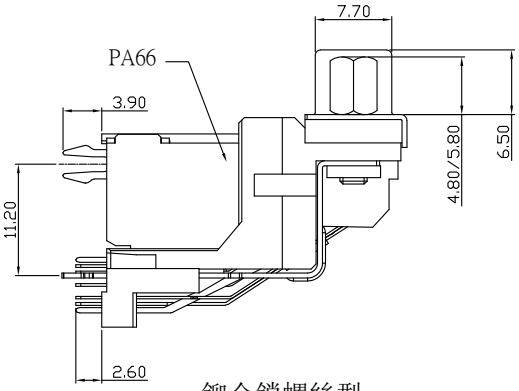

鉚合鎖螺絲型

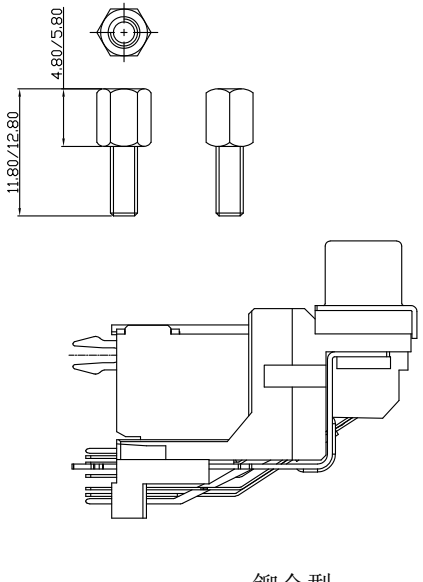

鉚合型

僅供參考

KIN TA PRECISION CO., LTD. 金泰精密有限公司				TITLE /品名:DVI 90度 架高型 有隔板 DIP Type			核準發行章
				PART NO /料號:D34122-29F-Rxxxx			
APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位			
Xin	Chenrong	Chenrong	K-0V-012-00	mm	SHEET 1 OF 1		

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考,實際尺寸以承認圖為主	2025/12/19

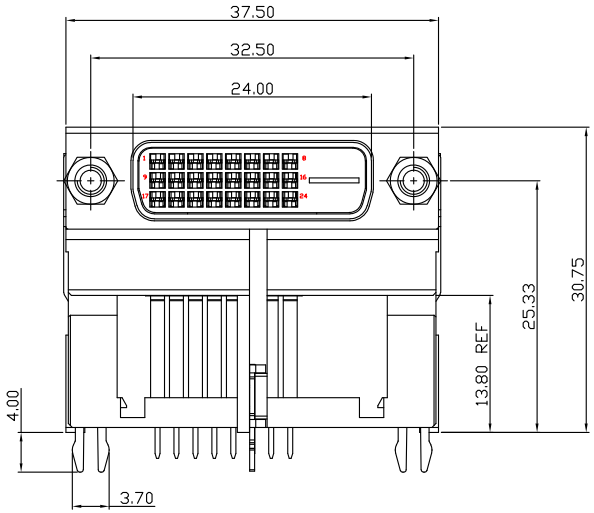

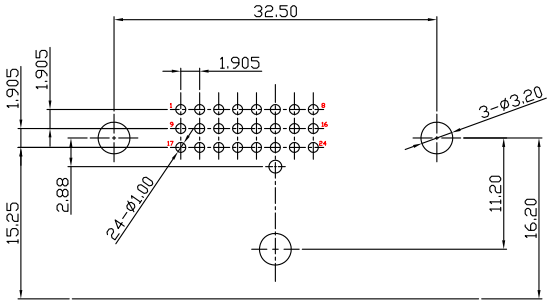

PCB LAYOUT

MATERIALS:
1. Housing: PA66 (UL 94V-0), White / Black
2. Bracket: PA66 (UL 94V-0), Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead≦40000PPM)
6. Board Lock: SPCC
7. Screw: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:
1. Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
3. Insulation Resistance: 1000MΩ Min. at DC 500V For 60S
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -20°C to 85°C



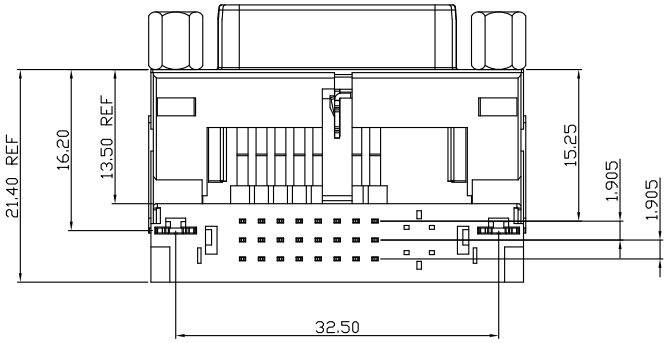

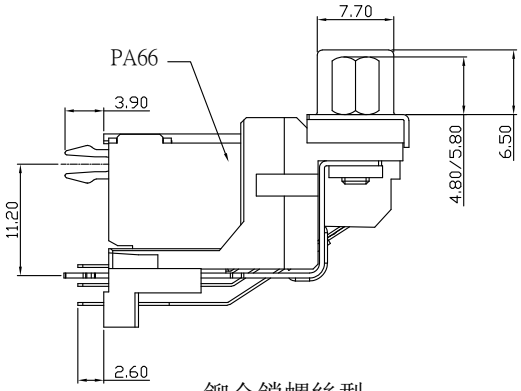

鉚合鎖螺絲型

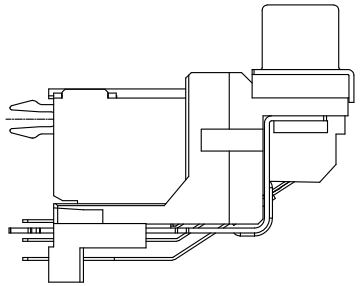

鉚合型

僅供參考

KIN TA PRECISION CO., LTD. 金泰精密有限公司				TITLE /品名:DVI 90度 架高型 有隔板 DIP Type			核準發行章
				PART NO /料號:D34122-24F-Rxxxx			
APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位			
Xin	Chenrong	Chenrong	K-0V-012-00	mm	SHEET 1 OF 1		

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考,實際尺寸以承認圖為主	2025/12/19