
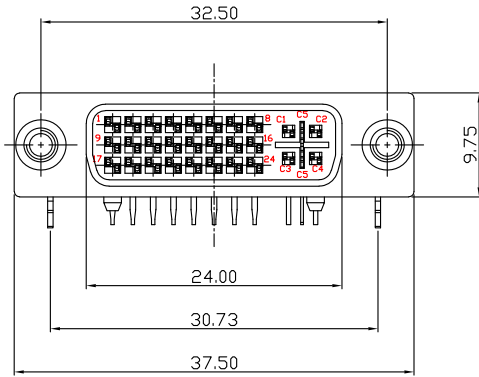


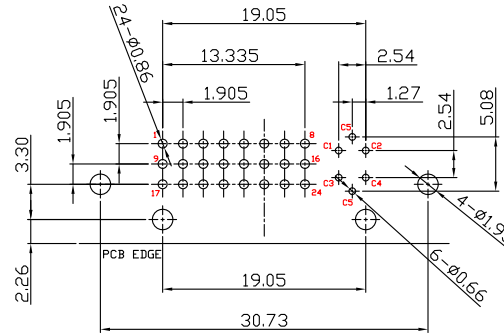

RECOMMENDED PCB LAYOUT

MATERIALS:

1. Housing: PBT / PA66 (UL 94V-0), White / Black
2. Cover: PA66 (UL 94V-0), White / Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
6. Board Lock: SPCC
7. Screw: SPCC




Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
3. Insulation Resistance: 1000M Ω Min. at DC 500V For 60S
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -20°C to 85°C

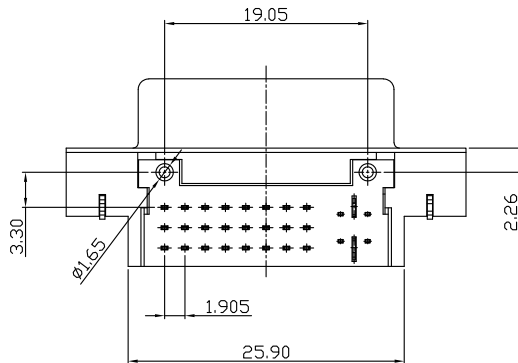

鉗合型



鉗合鎖螺絲型



僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: DVI 90度 母座 (板邊距2.26+3.3) 有柱 DIP Type

PART NO / 料號: D73110-29F-Rxxxx



核準發行章

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	A-0V-004-00

UNIT / 單位	SHEET 1 OF 1
mm	

NO.	REV / 版本
	1.0

NO.	REV / 版本	修訂內容	日期
	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19

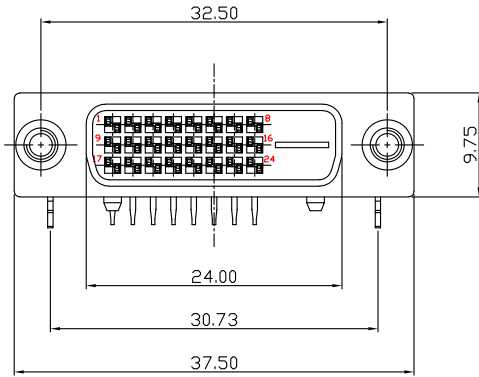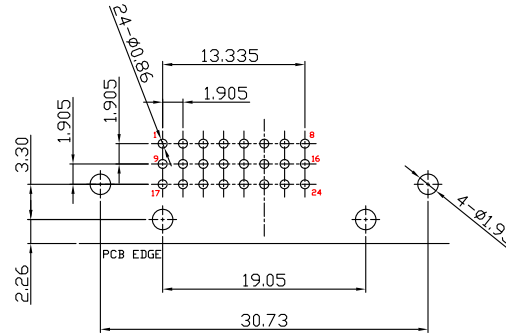

RECOMMENDED PCB LAYOUT

MATERIALS:




1. Housing: PBT / PA66 (UL 94V-0), White / Black
2. Cover: PA66 (UL 94V-0), White / Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
6. Board Lock: SPCC
7. Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
3. Insulation Resistance: 1000M Ω Min. at DC 500V For 60S
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -20°C to 85°C

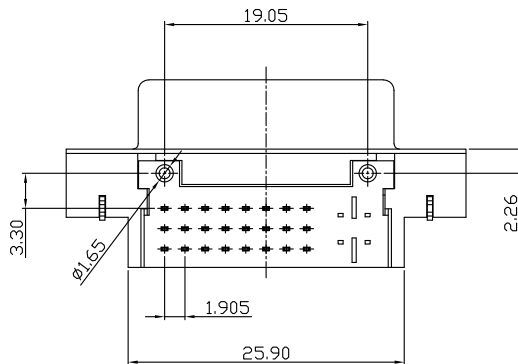

鉗合型



鉗合鎖螺絲型



僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: DVI 90度 母座 (板邊距2.26+3.3) 有柱 DIP Type

PART NO / 料號: D73110-24F-Rxxxx

核準發行章

APPROVE / 核準

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO / 圖號

UNIT / 單位

SHEET 1 OF 1

NO.

REV / 版本

圖面僅供參考, 實際尺寸以承認圖為主

2025/12/19

修訂內容

日期