
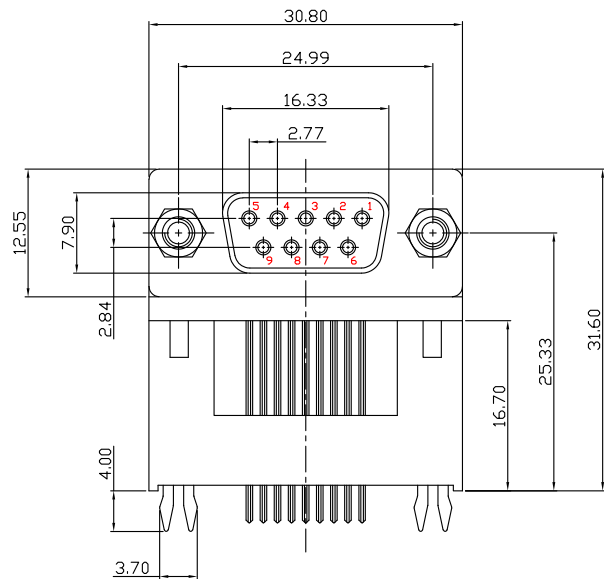


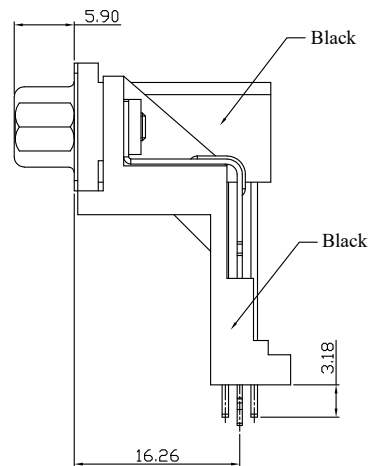

MATERIALS:




1. Housing: PBT (UL 94V-0), Black
2. Bracket: PBT (UL 94V-0), Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
6. Board Lock: SPCC
7. Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V For 1 minute
3. Insulation Resistance: 5000M Ω Min
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to +105°C

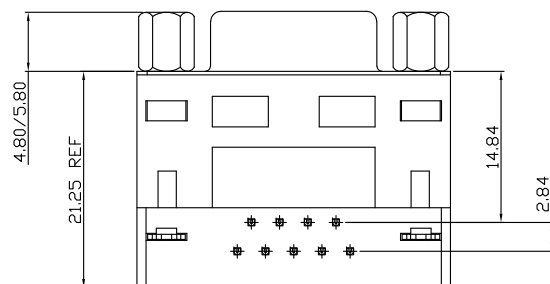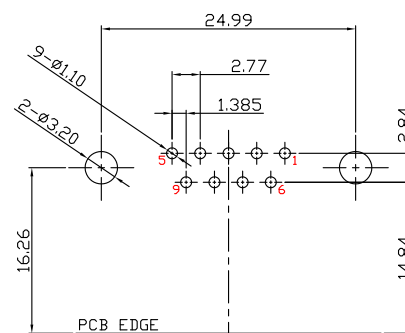

P.C.B. LAYOUT

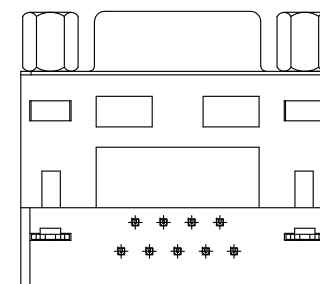

鉚合鎖螺絲型



鉚合型

僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: D-Sub 二排 9P 母座 90度 架高型 DIP Type

PART NO / 料號: D35122-09F-Rxxxx

核準發行章

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	L-0D-031-00

UNIT / 單位	SHEET 1 OF 1
mm	

NO.	REV / 版本	修訂內容	日期
1.0		圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19