
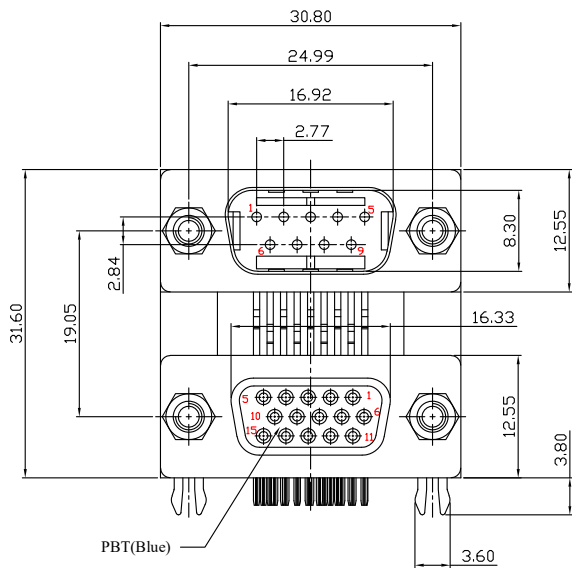


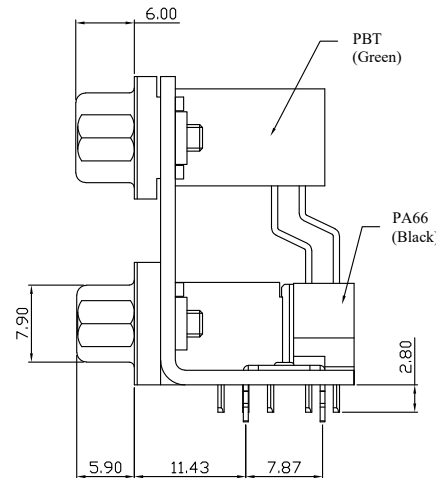

MATERIALS:


1. Housing: PBT (UL 94V-0)
9M Color: Green
15F Color: Blue
2. Connecting Seat: PA66 (UL 94V-0) Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
6. Board Lock: SPCC
7. L Bracket: SPCC
8. Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:


1. 9M Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- 15F Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. L Bracket: Nickel Plated
6. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V For 1 minute
3. Insulation Resistance: 5000M Ω Min
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to +105°C

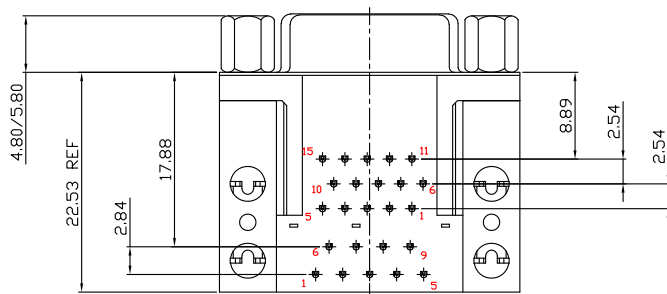

鉗合鎖螺絲型

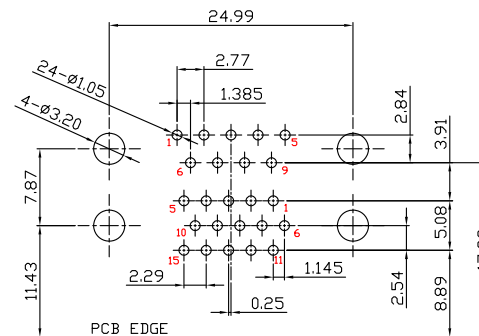

P.C.B. LAYOUT

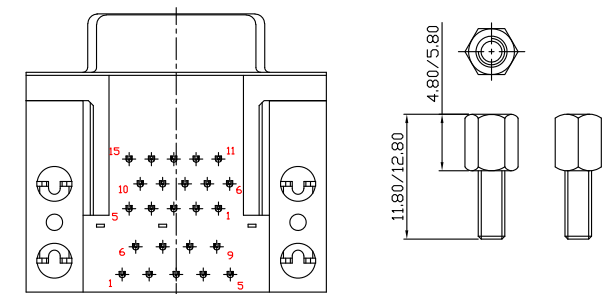

鉗合型

僅供參考

KIN TA PRECISION CO., LTD.

金泰精密有限公司

TITLE / 品名: D-Sub 90度 疊層 9公+VGA-15母(8.89) Dip Type (層距19.05/後排板邊距17.88)

PART NO / 料號: DB4222-1M1F-Rxxxx

核準發行章

APPROVE / 核准

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO / 圖號

UNIT / 單位

SHEET 1 OF 1

NO. REV / 版本

1.0

圖面僅供參考, 實際尺寸以承認圖為主

2025/12/19

修訂內容

日期

Kin

Chenrong

Chenrong

A-2D-005-00

mm

SHEET 1 OF 1

NO. REV / 版本

1.0

修訂內容

日期